



Ovens

ADVANCE PLUS ovens

GAS ADVANCE PLUS OVEN, APG-202

19010040

DIMENSIONS

		Article	Packed
Length	mm	1.162,00	1.200,00
Depth	mm	1.074,00	1.200,00
Height	mm	1.841,00	2.000,00
Weigth	Kg	405,00	430,00
Volumen	m3	2,30	2,88

ELECTRICITY

Electric power	KW	2,00
230V -1+N	2x1,5+T - 10 A	
230V - III		
400V - III+N		

PLUMBING - WATER

Water consumption (lit/h)	30,00
Pressure (Kg/cm2)	2 - 4

GAS

Power	KW	65,00
	Kcal/h	55.900,00
LPG	Consumption (kg/h)	3,50
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	5,00
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 62,00

Certificate EQNET- CE

99BL580

GAS ADVANCE PLUS OVEN, APG-202

High quality, fast cooking :

- Professional quality and perfect results
- Easy to use and efficient

Capacity for 40 1/1-GN trays or 20 GN-2/1 trays.

Stainless steel burner with electronic control system with sparking plug ignition.

Frequency modulation for the convection burner.

"Touch control" screen.

4 cooking methods: Steam, Adjustable Steam (Humidity control during cooking), Regeneration and Convection (up to 300°C).

Preheating option.

Fagor Easy cooking mode.

Fagor Cooking, range of cooking programmes.

Fagor Multi-Tray System, control cooking by tray.

Delayed programming for: Cooking, Low-temperature cooking and Washing.

Memory function: records the different cooking methods used.

3 Speeds - 2 power ranges.

Cold-Down chamber cooling system.

"Auto-reverse" system to reverse fan rotation.

5 wash programmes.

Multisensor temperature probe.

PC management software: History, recipes. HACCP, manuals...

HACCP cooking data recording system.

Steam generator equipped with limescale detector.

Steam generator automatically empties every 24 hours of cooking.

Semi-automatic limescale removal system.

Error detection system. "Repair service" mode system.

IPX-5 protection.

Retractable shower.


Built-in trolley and structure for trays.


Power intake: 230 V -1+N - 2 kW.

Gas heating capacity: 55,900 Kcal/h. (65 kW).


Dimensions: 1,162 x 1,074 x 1,841 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	987	870	110		Prever Interruptor diferencial
COLD WATER	1.076	581	110	3/4"	Prever llave de corte en la toma
SOFT COLD WATER	1.073	511	110	3/4"	Prever llave de corte en la toma
DRAIN	90	160	110	1"	
EXHAUST	841	238	1.900	120	
GAS	1.000	510	110	R.3/4"G	Prever regulador y llave de corte individual




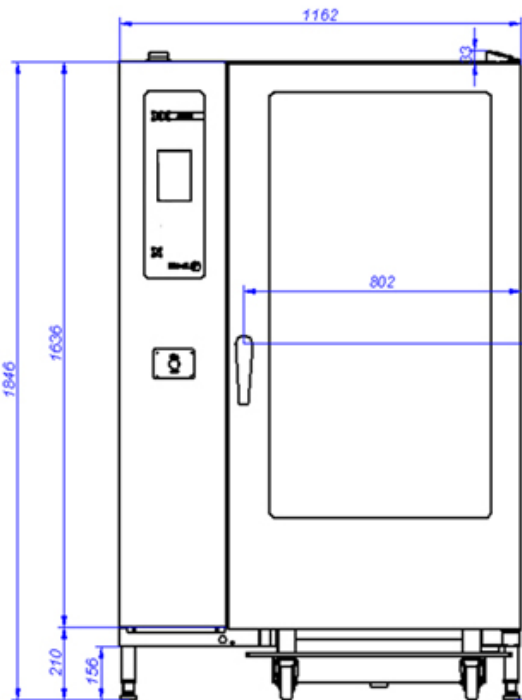

APG-202

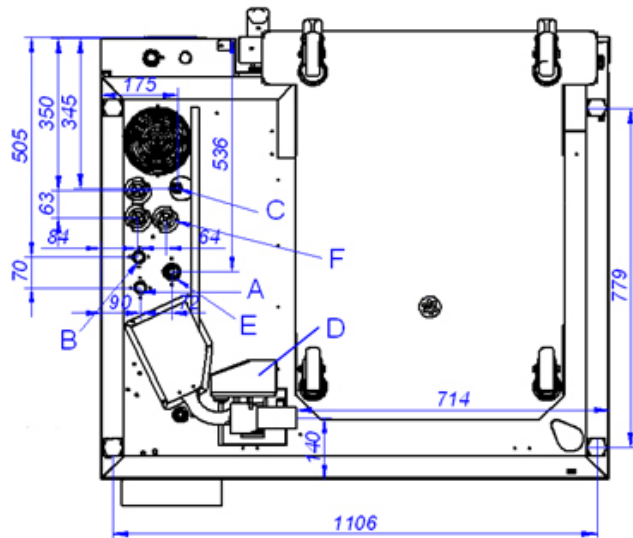

VISTA DE LA BASE DESDE LA PARTE INFERIOR
VIEW FROM THE BOTTOM OF THE MACHINE

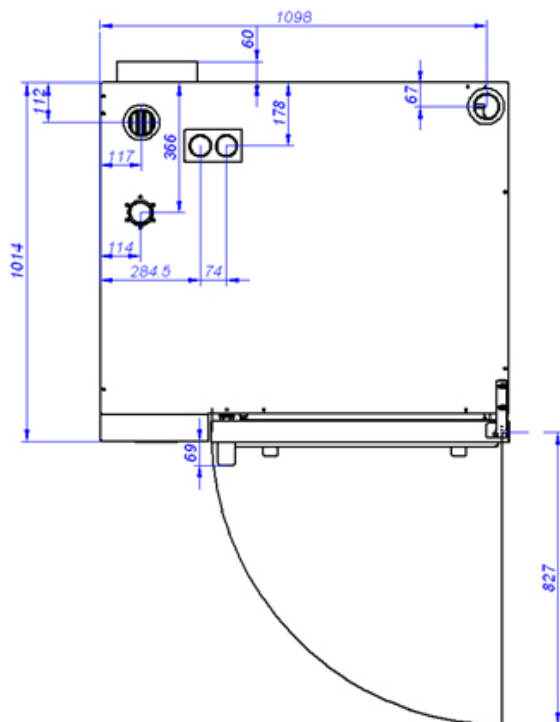

A: Entrada de agua blanda
B: Entrada de agua dura
D: Desagüe

C: Alimentación eléctrica

E: Entrada de gas

F: Entrada de aire

A: Soft water inlet

B: Water inlet

D: Drain

C: Electrical connection

E: Gas inlet

F: Air