

## EXTERIOR

- Acero Inox AISI 304 18/10
- Respaldo en chapa galvanizada

## INTERIOR

- Acero Inox AISI 304 18/10
- Desagüe interior
- Fondo embutido con amplios radios
- Iluminación LED
- Parrillas de alambre de acero plastificado (530x650), regulables en altura y fácilmente desmontables
- Marcos puerta calefactados para evitar acumulación de hielo (BT)

## AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m<sup>3</sup>, bajo GWP y cero efecto ODP

## PUERTAS

- Contrapuerta embutida
- Burlete de triple cámara fácilmente sustituible
- Puertas con tirador integrado
- Bisagra pivotante con bloqueo de apertura

## PATAS

- Patas en acero inox regulables en altura hasta 200 mm

## REFRIGERACIÓN

- Sistema de refrigeración compacto Monobloc, INFRIBLOCK
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa
- Control temperatura final del desescarche
- Desescarche por gas caliente (BT)

## CONTROL DIGITAL

- Táctil por membrana a 30 amp.

## OPCIONAL / OPTIONAL

- Parrilla / Wire shelf (502X14)
- Juego de guías / Slides (503X02; 503X03)
- Cerradura / Lock (506X120; 506X121)

## EXTERIOR

- AISI 304 18/10 stainless steel
- Galvanized steel back

## INTERIOR

- AISI 304 18/10 stainless steel
- Internal drain
- Sealed interior floors and rounded cabinet corners
- LED Lighting
- Plastic coated Wire shelves (530x650), adjustable height and easy removal
- Heated door frame to avoid accumulation of ice (BT)

## INSULATION

- Free CFC's high density (40kg/m<sup>3</sup>) polyurethane insulation with low GWP & zero ODP effect

## DOORS

- Stamped rear door
- Easy removal triple chamber gasket
- Integrated handle doors
- Self closing doors with stay open feature

## LEGS

- Stainless steel adjustable legs up to 200 mm

## REFRIGERATION

- Compact refrigeration system Monobloc
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray
- Control of the final defrost temperature
- Hot gas defrost (BT)

## DIGITAL CONTROL

- Touch membrane 30 amp.



I INFRIBLOCK

| MODELOS<br>MODELS | → ↗ ↑<br>Dimensiones<br>LxPxH (mm) | ⚡<br>Potencia<br>Power (W) | ⚡<br>Eléctrica<br>Electrical (W/Hz) | 📦<br>Capacidad<br>Capacity (L) | 🚪<br>Puertas<br>Doors | 📏<br>Nº parrillas / J. guías<br>No shelves / Slides | ❄️<br>Poder de congelación<br>Freezing power (Kg/24h) | 🌀<br>Compresor<br>Compressor (HP) | 🛒<br>Consumo<br>Consumption (kWh/24h) | 💧<br>Evaporación<br>Evaporation | 🌡️<br>Régimen T <sup>RA</sup><br>(38°C) | 🔥<br>Desescarche<br>Defrost | 🕒<br>Control<br>Control | ❄️<br>Refrigerante<br>Refrigerant |
|-------------------|------------------------------------|----------------------------|-------------------------------------|--------------------------------|-----------------------|-----------------------------------------------------|-------------------------------------------------------|-----------------------------------|---------------------------------------|---------------------------------|-----------------------------------------|-----------------------------|-------------------------|-----------------------------------|
| AGB 701           | 687x794x2130                       | 585                        | 220/50                              | 610                            | 1                     | 3/3<br>(530x650)                                    | -                                                     | 1/3                               | 3,23                                  | Forzada<br>Forced               | -2°C/+8°C                               | Automático<br>Automatic     | Digital<br>30 AMP       | R 134 a                           |
| AGB 1402          | 1385x794x2130                      | 945                        | 220/50                              | 1340                           | 2                     | 6/6<br>(530x650)                                    | -                                                     | 1/2                               | 4,31                                  | Forzada<br>Forced               | -2°C/+8°C                               | Automático<br>Automatic     | Digital<br>30 AMP       | R 134 a                           |
| AGB 701 BT        | 687x794x2130                       | 1000                       | 220/50                              | 610                            | 1                     | 3/3<br>(530x650)                                    | 2,5                                                   | 5/8                               | 7,92                                  | Forzada<br>Forced               | -18°C                                   | Automático<br>Automatic     | Digital<br>30 AMP       | R 404 A                           |
| AGB 1402 BT       | 1385x794x2130                      | 1390                       | 220/50                              | 1340                           | 2                     | 6/6<br>(530x650)                                    | 5                                                     | 1 1/4                             | 9,67                                  | Forzada<br>Forced               | -18°C                                   | Automático<br>Automatic     | Digital<br>30 AMP       | R 404 A                           |


Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.



AGB 701




AGB 1402 BT

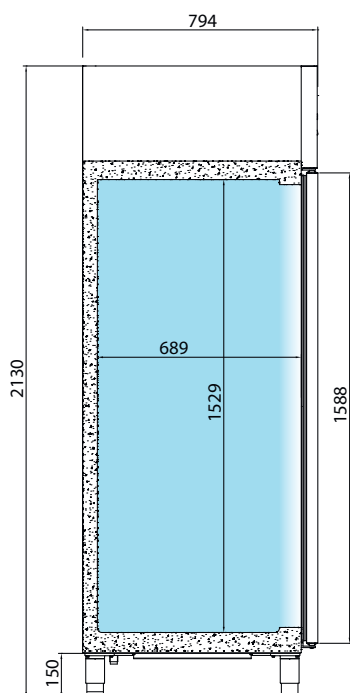

**Precio · Price €**




AGB 701



AGB 1402



AGB 701 BT



AGB 1402 BT