



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Model #: \_\_\_\_\_

MODEL: **AGN 602 MX****REACH-IN:**  
**Slimline Reach-in Refrigerators & Freezers (Dual Temp)****AGN 602 MX****General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability for the adjustment of temperatures ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

| MODEL      | Dimensions<br>(inches) (mm) |        |      | N°<br>Doors | N°<br>Shelves | Ref.  | Ref.<br>Weight<br>(Lbs.) (gr.) | Temp.<br>Range<br>(°F) (°C) | Capacity<br>(Cu. Ft.)<br>(L) | Cond.<br>Unit.<br>H.P. | Case<br>Amps<br>115 V. | Crated<br>Weight<br>(Lbs.)<br>(Kg.) |
|------------|-----------------------------|--------|------|-------------|---------------|-------|--------------------------------|-----------------------------|------------------------------|------------------------|------------------------|-------------------------------------|
|            | W                           | D      | H    |             |               |       |                                |                             |                              |                        |                        |                                     |
| AGN 602 MX | 38-3/8                      | 27-3/8 | 83   | 2           | 6             | R134a | 0.55<br>250                    | 33°F/38°F<br>0°C/4°C        | 12<br>340                    | 1/4                    | 13.1                   | 417<br>190                          |
|            | 975                         | 695    | 2100 |             |               | R404A | 0.66<br>300                    | -5°F/0°F<br>-20°C/-18°C     | 12<br>340                    | 3/8                    |                        |                                     |

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

**AUTODESK  
REVIT**

**Infrico USA Corp.**  
3325 N.W. 70th Avenue  
Miami, FL 33122-1332  
1.305.777.9599 Office  
1.305.777.9598 Fax

**www.infrico.us**  
operations@infrico.com  
service@infrico.com  
sales@infrico.com

**APPROVALS: AVAILABLE AT:**



Project: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_  
Model #: \_\_\_\_\_

MODEL: **AGN 602 MX**

**REACH-IN:**  
*Slimline Reach-in Refrigerators & Freezers (Dual Temp)*

STANDARD FEATURES

- **Exterior**

  - AISI 304 Stainless Steel.
  - Completely injected compact structure.

➤ **Interior**

  - AISI 304 Stainless Steel.
  - Wide rounded corners to aid cleaning.
  - LED lighting.
  - Internal drain.

➤ **Insulation**

  - High density CFC free Polyurethane foam.

➤ **Doors**

  - Self closing with stay open feature.
  - Integrated door handles.
  - AISI 430 Stainless Steel covered hinges.
  - Triple chamber snap in door seals for easy removal.
  - Door lock provided.
  - Full-height door opening: 14-3/4"x58-7/8" (375x1500 mm).
- **Shelving**

  - (3) Plastic coated wire shelves per door.
  - Set of Stainless Steel rails per shelf included.
  - Dimensions WxD: 12-3/4"x20-7/8" (324x530 mm).
  - Compatible with 12"x20" (305x508 mm). sheet pans.

➤ **Casters**

  - 4" diameter casters.
  - Locks provided on front set.

➤ **Refrigeration**

  - Temperature and defrost regulated by a digital controller.
  - Evaporative pan-stainless steel.
  - Evaporator coil coated with anti-corrosion material.
  - Low temp with expansion valve and hot gas defrost system (BT).
  - Heated door frame to avoid accumulation of ice (BT)
  - **Each compartment has its own refrigeration (BT).**

➤ **Electrical**


  - Cord and NEMA 5-20P plug.
  - Electrical connection is 115V / 1ph / 60 Hz.



OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf.
- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 230V / 1ph / 50 Hz (plug type

➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

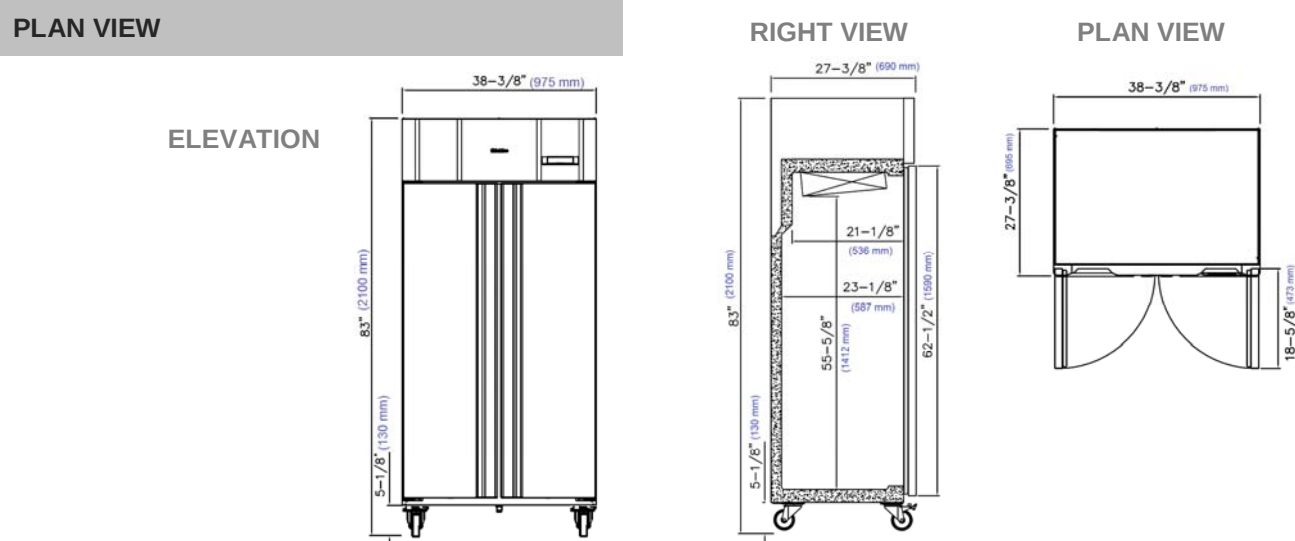

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE