



Project: _____
 Location: _____
 Item #: _____ Quantity: _____
 Model #: _____

MODEL: **AN 23**

REACH-IN:
Bottom Mounted Reach-in Refrigerators



AN 23

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and cabinet sides reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODEL	Dimensions (inches) (mm)			N° Door	N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
AN 23	27 687	31-3/8 800	83-3/8 2087	1	3	R134a	0.53 240	33°F/38°F 0°C/4°C	23 652	1/3	6.7	306 139

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



**AUTODESK
REVIT**

Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 operations@infrico.com
 service@infrico.com
 sales@infrico.com

APPROVALS: AVAILABLE AT:



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **AN 23**

REACH-IN:
Bottom Mounted Reach-in Refrigerators

STANDARD FEATURES

- **Exterior**

 - AISI 430 Stainless Steel.
 - Completely injected compact structure.

➤ **Interior**

 - AISI 430 Stainless Steel.
 - Wide rounded corners to aid cleaning.
 - LED lighting.
 - Internal drain.

➤ **Insulation**

 - High density CFC free Polyurethane foam.

➤ **Doors**

 - Self closing with stay open feature.
 - Integrated door handles.
 - AISI 430 Stainless Steel covered hinges.
 - Triple chamber snap in door seals for easy removal.
 - Field Reversible.
 - Door lock provided.
 - Full-height door opening: 23"x53" (584x1346) (mm).
- **Shelving**

 - (3) Plastic coated wire shelves per door.
 - Set of Stainless Steel rails per shelf included.
 - Dimensions WxD: 20-7/8"x25-5/8" (530x650) (mm).
 - Compatible with 18"x26" (457x660) (mm). sheet pans.

➤ **Casters**

 - 4" diameter casters.
 - Locks provided on front set.

➤ **Refrigeration**

 - Temperature and defrost regulated by a digital controller.
 - Evaporative pan-stainless steel.
 - Evaporator coil coated with anti-corrosion material.

➤ **Electrical**


 - Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.



OPTIONAL FEATURES

- ✓ Stainless Steel wire shelf.
- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

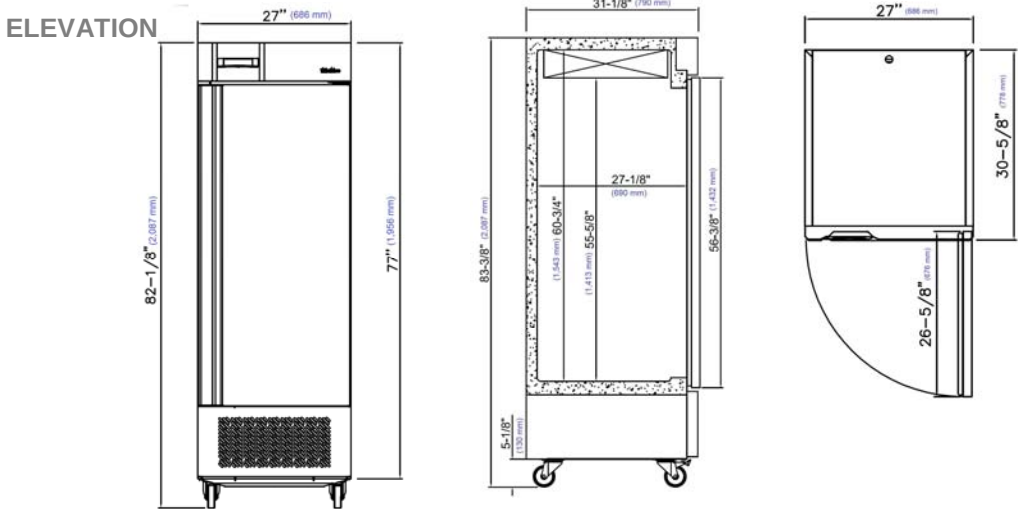

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE