



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **EML 12 INOX M2****AIR CURTAINS – Vertical & Glass Sided – Stainless Steel****EML 12 INOX M2****General Strengths**

- ✓ **Sanitation.** Ability of dismantling the shelves and guides for a correct cleaning of the machine's interior.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust of temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Modular Line.**
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** LED lighting in the canopy and under each shelf, reduces the energy consumption by 80% and 90% compared to a traditional bulb. Provides a much better light quality.

MODEL	Dimensions (inches) (mm)			N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115V.	Crated Weight (Lbs.) (Kg.)
	W	D	H								
EML12 INOX M2	52-1/4 1330	33-1/2 850	78-3/4 2000	4	R404A	1.43 650	33°F/41°F 0°C/5°C	31.53 900	1	18	606 275

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

AUTODESK
REVIT

Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 operations@infrico.com
 service@infrico.com
 sales@infrico.com

APPROVALS: AVAILABLE AT: _____



Project: _____

Location: _____

Item #: _____ Quantity: _____

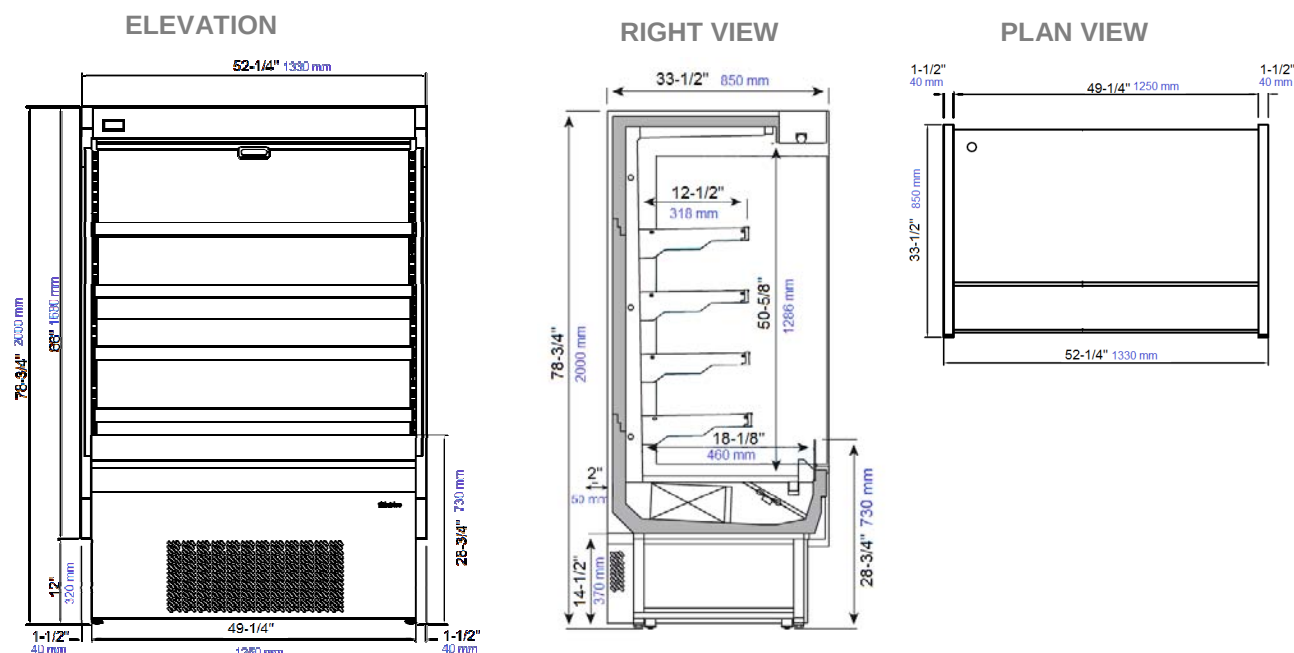
Model #: _____

MODEL: EML 12 INOX M2**AIR CURTAINS – Vertical & Glass Sided – Stainless Steel****STANDARD FEATURES**

- **Cases can be multiplexed.**
- **Exterior**
 - AISI 304 Stainless Steel.
 - Thermopane side glass.
 - Levelling feet.
 - Built-in casters.
 - Pull down night shade.
- **Interior**
 - AISI 304 Stainless Steel.
 - LED lighting in canopy and under each self.
- **Insulation**
 - High density CFC free Polyurethane foam.
- **Shelving**
 - (4) rows adjustable shelves.
- **Refrigeration**
 - Temperature and defrost regulated by a digital controller.
 - Time initiated-time terminated off-cycle defrost.
 - Evaporative pan-stainless steel.
 - Evaporator coil coated with anti-corrosion material.
 - Pull out condensing unit.
 - Recommendation: Case engineered to operate at 75°F and 60% RH.
- **Electrical**
 - Cord and NEMA 5-20P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.

**OPTIONAL FEATURES**

- ✓ Electrical connection is 230V / 1ph / 50 Hz (plug type varies).
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**

PLAN VIEW

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

AUTODESK
REVIT

Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 operations@infrico.com
 service@infrico.com
 sales@infrico.com

APPROVALS: AVAILABLE AT: _____