




Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

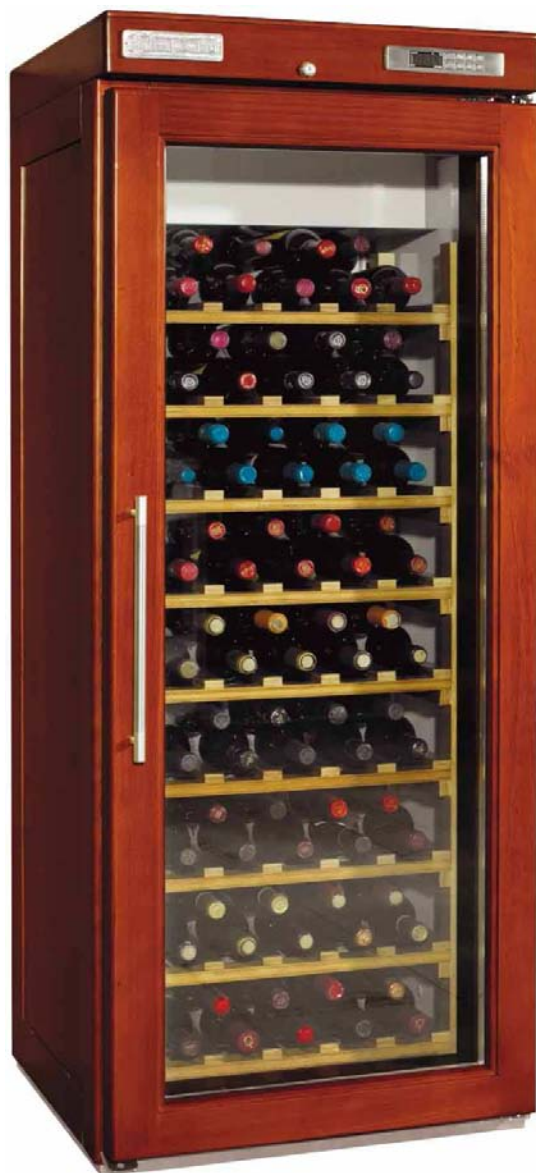MODEL: **EVV 100****WINE COOLERS****EVV 100****General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors include triple chamber door gaskets, easy to remove and snap in.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)
- ✓ **Lighting.** Interior cabinet includes LED lighting, for brighter lighting and energy efficiency. LED saves 90% more energy compared to traditional fluorescent bulbs. Increases product visibility considerably.

MODEL	Dimensions (inches) (mm)			N° Bottles	N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
EVV 100	26 660	24-2/5 620	73-3/5 1870	100	10	R134a	0.62 280	39°F/64°F 4°C/18°C	11.3 320	1/3	5.9	290 130

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

AUTODESK
REVIT

Infrico USA Corp.
3325 N.W. 70th Avenue
Miami, FL 33122-1332
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
operations@infrico.com
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT:



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **EVV 100**

WINE COOLERS

STANDARD FEATURES

- The models in this range were designed and manufactured for the display and sale of red, white, rosé and brut wine bottles and is the best solution for serving wine at an ideal temperature.

➤ **Exterior**

 - A panelled structure with external solid wood insulation.

➤ **Interior**

 - Interior pre-lacquered sheet.
 - LED lighting.

➤ **Insulation**

 - High density CFC free Polyurethane foam.

➤ **Doors**

 - Solid wooden doors with double-glazing.
 - Self closing with stay open feature.
 - Integrated door handles.
 - Triple chamber snap in door seals for easy removal.
 - Door lock provided.
- **Refrigeration**

 - Temperature and defrost regulated by a digital controller.
 - Forced air cooling.
 - Evaporator coil coated with anti-corrosion material.

➤ **Temperature**

 - A single temperature (from 39°F (4°C) to 64°F (18°C)) and appropriate humidity (50% to 70%).
 - Recommended temperature, Red Wine between 50°F (10°C) to 64°F (18°C) and White, Rosé and brut between 39°F (4°C) to 46°F (8°C).

➤ **Electrical**

 - Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.


➤ **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**



OPTIONAL FEATURES

- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

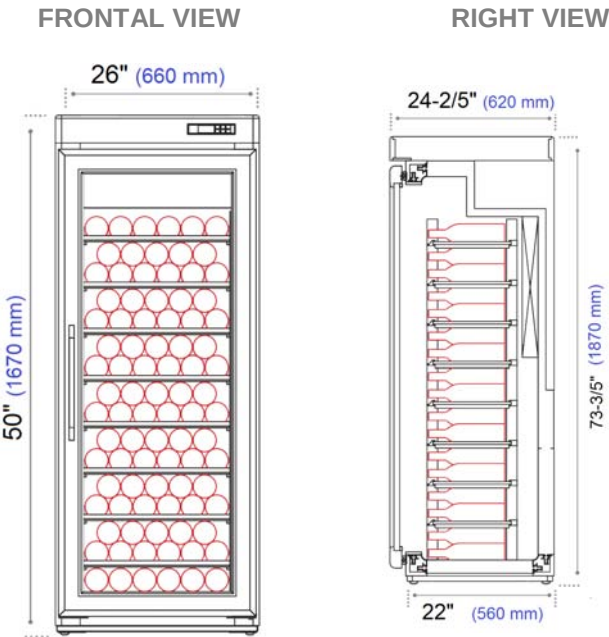

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE