



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **IMC 49 SS**

MILK COOLERS:
Single Sided Refrigerators



IMC 49 SS

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in.

- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODEL	Dimensions (inches) (mm)			N° Doors	Capacity Crates	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
IMC 49 SS	49 1245	33-3/8 848	49-1/2 1258	2	12	R134a	0.66 300	33°F/38°F 0°C/4°C	19 540	1/3	5.9	353 160

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **IMC 49 SS**

MILK COOLERS:
Single Sided Refrigerators

STANDARD FEATURES

- **Exterior**

 - AISI 304 Stainless Steel Top.
 - White laminated steel sides.

➤ **Interior**

 - AISI 304 Stainless Steel depth.
 - White laminated steel sides.

➤ **Insulation**

 - High density CFC free Polyurethane foam.

➤ **Doors**

 - AISI 430 Stainless Steel.
 - Door lock provided.
- **Shelving**

 - (1) Stainless Steel wire shelves.

➤ **Casters**

 - 4" diameter casters.
 - Locks provided on front set.

➤ **Refrigeration**

 - Temperature regulated by digital control.
 - Ventilated condensation system.
 - Forced air refrigeration system.

➤ **Electrical**


 - Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**



OPTIONAL FEATURES

- ✓ Customizable Product.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

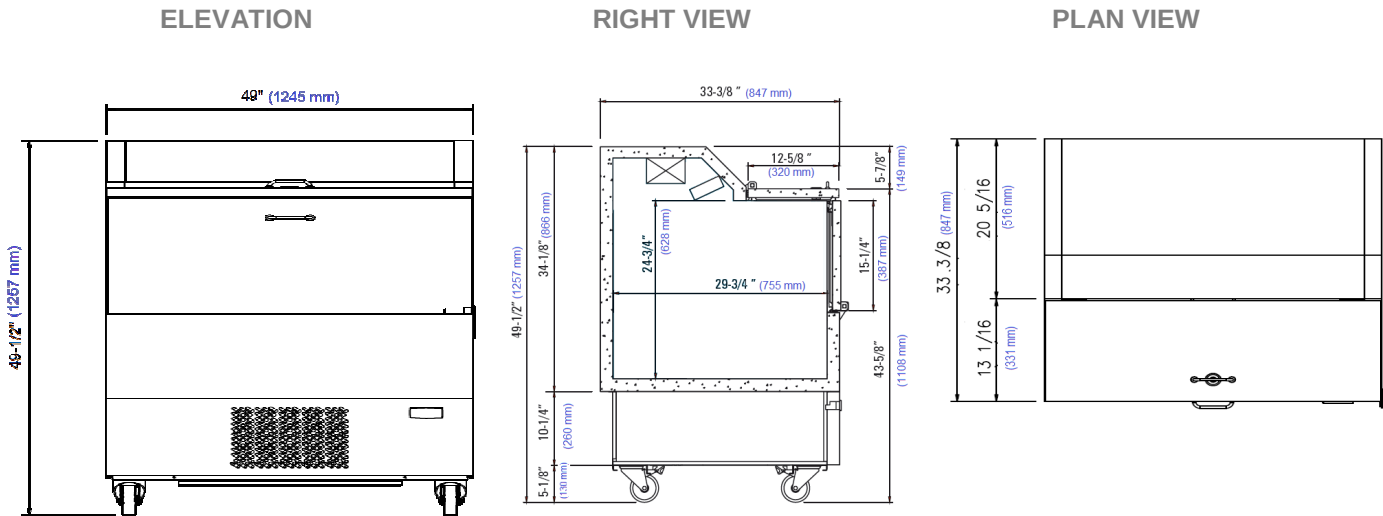

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE