



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **MR 119 EN****UNDERCOUNTER:**
Pizza Prep Tables

MR 119 EN

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODEL	Dimensions (inches) (mm)			N° Doors /Pans	N° Shelves/ Lids	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
MR 119 EN	119-1/4 3030	32-5/8 830	40-1/4 1050	4 / 16	8 / 3	R134a	0.73 330	38°F/41°F 3°C/5°C	27 765	5/8	8.9	640 290

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

AUTODESK
REVIT

Infrico USA Corp.
3325 N.W. 70th Avenue
Miami, FL 33122-1332
1.305.777.9599 Office
1.305.777.9598 Fax

www.infrico.us
operations@infrico.com
service@infrico.com
sales@infrico.com

APPROVALS: AVAILABLE AT: _____



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **MR 119 EN**

UNDERCOUNTER:
Pizza Prep Tables

STANDARD FEATURES

- **Exterior**

 - AISI 304 Stainless Steel Top.
 - Front and sides AISI 430 Stainless Steel.
 - Completely injected compact structure.

➤ **Interior**

 - AISI 430 Stainless Steel.
 - Wide rounded corners to aid cleaning.
 - Internal drain.

➤ **Insulation**

 - High density CFC free Polyurethane foam.

➤ **Doors**

 - Self closing with stay open feature.
 - Integrated door handles.
 - AISI 430 Stainless Steel covered hinges.
 - Triple chamber snap-in door gaskets for easy removal.
 - Door lock provided.
 - Field Reversible.
 - Full-height door opening: 21-5/8"x20-5/8" (550x523 mm).

➤ **Casters**

 - 4" diameter casters.
 - Locks provided on front set.
- **Salad Top**

 - AISI 304 Stainless Steel insulated lid.
 - Top includes 1/3 size polycarbonate food pans, (13) pans.
 - Pan divider bars available for varying size pan configurations.
 - Removable sanitary polyethylene cutting board included.

➤ **Shelving**

 - (2) Plastic coated wire shelves per door.
 - Stainless Steel wire shelves.
 - Set of Stainless Steel shelf brackets.
 - Easy remove for cleaning
 - Dimensions WxD: 20-7/8"x25-5/8" (530x650 mm).
 - Compatible with 12"x20" (305x508 mm). sheet pans.

➤ **Refrigeration**

 - INFRICOOL ventilated condensation system – front intake and discharge.
 - Temperature and defrost regulated by a digital controller.
 - Evaporative pan – Stainless Steel.
 - Evaporator coil coated with anti-corrosion material.
 - Slide out condensing unit for easy maintenance.




OPTIONAL FEATURES

- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Stainless Steel wire shelf.
- ✓ Single Overshelves kit.
- ✓ Double Overshelves kit.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

- **Electrical**
- Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.
- **ETL Listed to UL471 Standard and Sanitation classified to NSF7.**



PLAN VIEW

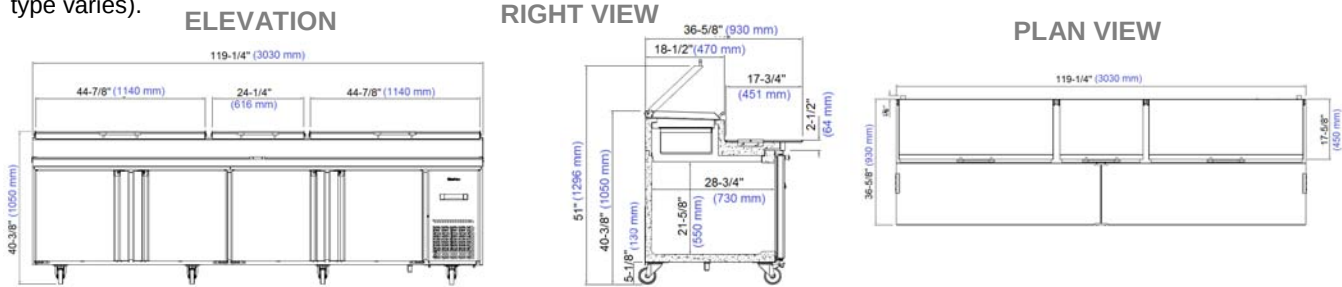

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE