



Project: _____

Location: _____

Item #: _____ Quantity: _____

Model #: _____

MODEL: **MR 93**
DEEP UNDERCOUNTER:
Undercounter Refrigerators
**MR 93****General Strengths**

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.
- ✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.
- ✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.
- ✓ **Certified.** Audited and Certified by **INTERTEK** for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODEL	Dimensions (inches) (mm)			N° Doors	N° Shelves	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H									
MR 93	93-1/4 2370	32-5/8 830	33-1/8 840	3	6	R134a	0.73 330	33°F/38°F 0°C/4°C	27 765	1/2	7.7	553 250

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE

AUTODESK
REVIT
Infrico USA Corp.
 3325 N.W. 70th Avenue
 Miami, FL 33122-1332
 1.305.777.9599 Office
 1.305.777.9598 Fax

www.infrico.us
 operations@infrico.com
 service@infrico.com
 sales@infrico.com

APPROVALS: AVAILABLE AT:



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: **MR 93**

DEEP UNDERCOUNTER:
Undercounter Refrigerators

STANDARD FEATURES

- Exterior

 - AISI 304 Stainless Steel Top.
 - Front and sides AISI 430 Stainless Steel.
 - Completely injected compact structure.

➤ Interior

 - AISI 430 Stainless Steel.
 - Wide rounded corners to aid cleaning.
 - Internal drain.

➤ Insulation

 - High density CFC free Polyurethane foam.

➤ Doors

 - Self-closing with stay open feature.
 - Integrated door handles.
 - AISI 430 Stainless Steel covered hinges.
 - Triple chamber snap-in door gaskets for easy removal.
 - Door lock provided.
 - Field Reversible.
 - Door opening: WxH= 22-7/8"x20-5/8" (580x525 mm).
- Shelving

 - Plastic coated wire shelves and shelf brackets.
 - Easy removable for cleaning.
 - (2) shelves per door and a set of rails per shelf included.
 - Dimensions WxD: 20-7/8"x25-5/8" (GN 2/1) (530x650 mm).
 - Compatible with 18"x26" (457x660 mm) sheet pans.

➤ Casters


 - 4" diameter casters.
 - Locks provided on front set.

➤ Refrigeration

 - Temperature and defrost regulated by a digital controller.
 - Evaporative pan – Stainless Steel.
 - Evaporator coil coated with anti-corrosion material.
 - INFRICOOL® ventilation system – front intake and discharge.
 - Slide out condensing unit for easy maintenance.

OPTIONAL FEATURES

- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Stainless Steel wire shelf.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).
- ✓ Back Splash – Worktop.
- ✓ Single Overshelves kit.
- ✓ Double Overshelves kit.

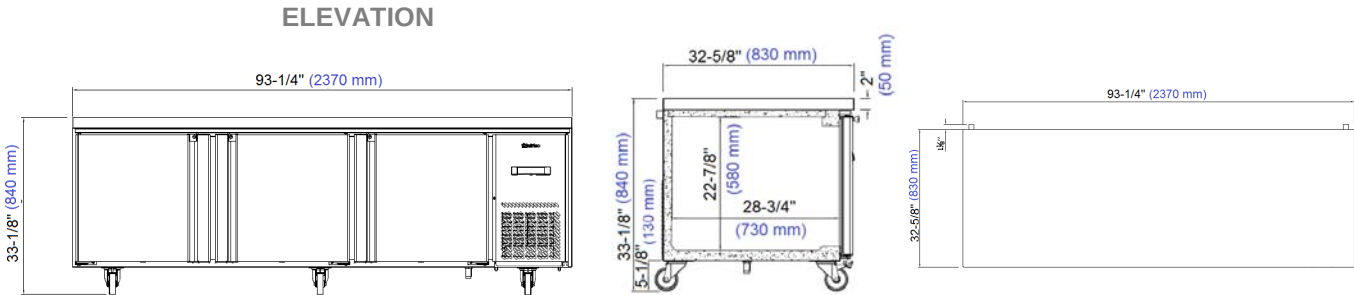

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 – WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE