



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: UC 48 4D

UNDERCOUNTER:
Undercounter Refrigerator Drawered



UC 48 4D

General Strengths

- ✓ **Sanitation.** The interior cabinet is built with rounded corners (extensive radius for easy cleaning). Quick ability to take off shelves and slides for interior cleaning. Each cabinet has a drain at the bottom of the unit. When cleaning the unit make sure the drain hose is routed to a floor drain.

✓ **Doors & Drawers.** Self-closing door system with permanent pressure. Stay open feature included when door remains open after 95 degrees. All doors and drawers include triple chamber door gaskets, easy to remove and snap in. Doors are field reversible.
- ✓ **Control systems.** Higher precision in managing temperature settings. Greater ability to adjust temperature ranges as per the end user's requirement.

✓ **100% Tested.** All condenser units are tested 100%, in helium chambers to refrigerant leak detections.

✓ **Certified.** Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7. AENOR audited and certified by internationally recognized firm. ISO 9001:2008 (Quality); ISO 14001:2004 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety)

MODELS	Dimensions (inches) (mm)			N° Drawers	Ref.	Ref. Weight (Lbs.) (gr.)	Temp. Range (°F) (°C)	Capacity (Cu. Ft.) (L)	Cond. Unit. H.P.	Case Amps 115 V.	Crated Weight (Lbs.) (Kg.)
	W	D	H								
UC 48 4D	48-1/8 1227	30-1/8 765	35-3/4 910	4	R134a	0.61 280	33°F/38°F 0°C/4°C	14 396	1/4	5.5	354 160

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE



Project: _____
Location: _____
Item #: _____ Quantity: _____
Model #: _____

MODEL: UC 48 4D

UNDERCOUNTER:
Undercounter Refrigerator Drawered

STANDARD FEATURES

- Exterior

 - AISI 304 Stainless Steel Top.
 - Front and sides AISI 430 Stainless Steel.
 - Completely injected compact structure.
- Interior

 - AISI 430 Stainless Steel.
- Insulation

 - High density CFC free Polyurethane foam.
- Drawers

 - Interior and Exterior in Stainless Steel.
 - Self closing with stay open feature.
 - Compatible with 1/2+1/3 pans (12-3/4"x10-1/2" + 12-3/4"x7") (pans not included).
- Casters

 - 4" diameter casters.
 - Locks provided on front set.
- Refrigeration

 - Front-breathing refrigeration system.
 - Temperature regulated by thermostatic control.
 - Evaporative pan.
 - Evaporator coil coated with anti-corrosion material.
- Electrical


 - Cord and NEMA 5-15P plug.
 - Electrical connection is 115V / 1ph / 60 Hz.
- ETL Listed to UL471 Standard and Sanitation classified to NSF7.



OPTIONAL FEATURES

- ✓ Set of 6" legs, height adjustable from 5" to 8".
- ✓ Set of 2" diameter casters, with lock provided on front set.
- ✓ Single Overshelves kit.
- ✓ Double Overshelves kit.
- ✓ 4" Backsplash.
- ✓ Electrical connection is 220-230 V / 1ph / 50 Hz (plug type varies).

PLAN VIEW

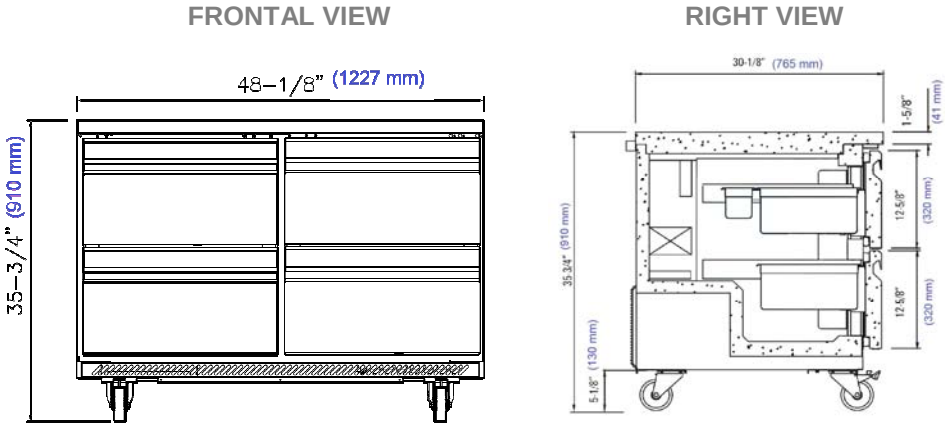

ETL LISTED TO UL471 STANDARD AND SANITATION CLASSIFIED TO NSF7 - WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE