

GALA NG 75
59 Lbs./ 24 Lbs.
27 kg./ 11 kg.



GALA NG 95
90 Lbs./ 37 Lbs.
41 kg./ 17 kg.



GALA NG 135
121 Lbs./ 44 Lbs.
55 kg./ 20 kg.

Daily Ice Production / Ice Storage

Standard Features



SPRAY SYSTEM (NOZZLES)

The spray nozzle, patented by ITV, does not allow calcareous build-up and produces solid transparent ice cubes which take longer to melt.



DYNAMIC PRODUCTION

The water is constantly circulating and the ice gradually forms in thin layers, avoiding trapped gasses and producing crystal clear ice cubes. Only the purest of ice cubes are produced.



SILENT RAIN

All parts in contact with water have been designed to minimize their friction resulting in a very low noise level.



ELECTROMECHANICAL CONTROLS

The machine works with electromechanical timer and thermostats. Simple, easy to comprehend and service. High reliability and low maintenance expense.



DUAL SWITCH

External switch allows to turn the machine on/off easily. Removing the top cover, we have the ice/wash switch on one side of the electrical box.



STRONG INOX FRAME. 304 STAINLESS STEEL CONSTRUCTION

Box-type frame with stainless steel supports, makes the machine stronger and allows servicing operation without disassembling the entire machine.



EASY ACCESS FOR SERVICE AND INSTALLATION

Designed to have better access to all components making installation and servicing operations easier. One person can disassemble the entire machine with a basic screwdriver.



FRONT VENTILATION

Condensing unit permits 100% front ventilation, air inflow and outflow through the front grill.



INSULATED STORAGE BIN

Storage bin with polyurethane foam insulation gives higher rigidity with lower heat transmission. Isolated but not refrigerated bins.



OPERATING LIMITS

Tropicalized machines (Class T); Suitable for low temperature environments of 41° (5°C) Air and Water and high temperature environments of 109°F (43°C) (Air), 95°F (35°C) (Water) Water pressure: Min. 10 psi. (0.7 bar.)/ Max. 85 psi. (6 bar.). NOTE: Install a pressure reducer if water inlet pressure is more than 85 psi. (6 bar.).



ELECTRICAL SPECIFICATIONS

115V/60Hz./1 - Fuse Size 15-20 - Nema Plug Type 5-15P. Also available 220V/50Hz. (Special order only.)




WARRANTY

36 months parts and labor + 24 additional months parts on compressor and evaporator.

Dimensions (Inch./Cm.)

GALA	W	D	H
NG 75	16" / 41 cm.	20 1/4" / 52 cm.	29 5/8" / 75 cm.
NG 95	18 1/4" / 47 cm.	23 3/8" / 60 cm.	31 1/4" / 80 cm.
NG 135	21 1/8" / 54 cm.		

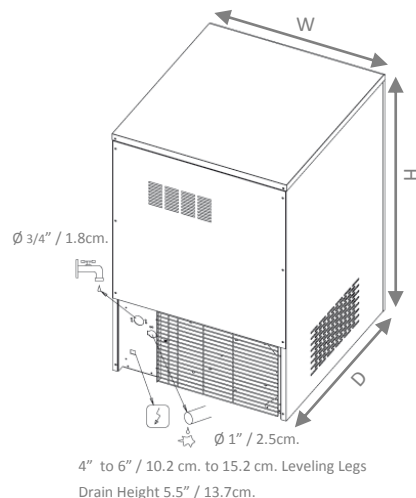

General Specifications

GALA	Production				Cubes	Storage	Water Usage gal./hr. / l./ hr.	Power W	Amps.	R404A oz.	Net Weight Lbs./ Kg.	Filtration Kit
	70°F Air/50°F Water		90°F Air/70°F Water									
	Lbs./ 24 h.	Kg./ 24 h.	Lbs./ 24 h.	Kg./ 24 h.	Cycle	Lbs./ Kg.	90°F/70°F					
13034 NG 75 A	59	27	46	21	18	24/11	1.10/4.00	425	6.2	6.00	84/38	CS-101 K
13035 NG 75 W	70	32	55	25	18	24/11		425	6.2	5.30	84/38	
13044 NG 95 A	90	41	70	32	24	37/17	2.60/10.0	550	7.2	9.88	106/48	CS-101 K
13045 NG 95 W	97	44	75	34	24	37/17		550	7.2	9.18	106/48	
13054 NG 135 A	121	55	95	43	36	44/20	4.20/16.00	650	9.4	11.65	128/58	CS-101 K
13055 NG 135 W	141	64	110	50	45	44/20		650	9.4	10.24	128/58	


A: Air—Cooled / W: Water—Cooled. Water Cooled Units: Available special order only with restrictions/requirements. Please contact your dealer for details.

Dimensions do not include adjustable legs from 4" (10.2 cm.) to 6" (15.2 cm.).

Shipping Weight: NG 75: 106 Lbs. (48 Kg.), **NG 95:** 126 Lbs. (57 Kg.), **NG 135:** 150 Lbs. (68 Kg.)

Due to our continuous efforts for improving and developing our range of products, ITV Ice Makers, Inc. reserves the right of changing features with no

Ice Shape



GALA Cubes