

ADVANTEDGE™ HALF-DOOR REACH-IN REFRIGERATORS



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: NLR23-SH, NLR49-SH, NLR72-SH

- **Exterior Finish:** Exterior front, sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior Finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** The complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self-adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model); 4 vinyl coated shelves per section; complete perimeter, anti-condensate door frame heater wires
- **Electrical:** An interior light is activated by a switch for each upper door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel. Reads °F or °C.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Drain line is recessed in cabinet back. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant in NLR23 and NLR49, R-404a in NLR72. Operating temperature range: +34°F to +38°F.
- **Approvals:** UL, C-UL, ETL Sanitation, and ENERGY STAR® Listed.

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature range: +34°F to +38°F
- Polyurethane insulation
- R-134a refrigerant for NLR23 & NLR49
- R-404a refrigerant for NLR72
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR® listed.
- Warranties: 3 year parts and labor, 5 year compressor


OPTIONAL FEATURES*

- 6" adjustable legs
- Extra vinyl-coated wire shelves
- Pan slide rack (part # 146515)


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** ETL Sanitation is Intertek Labs Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.



NLR23-SH
FRONT

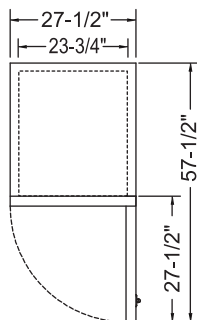

NLR23-SH
TOP

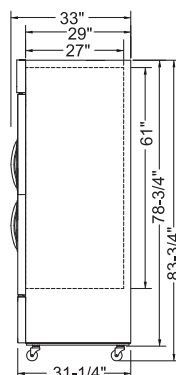


SIDE VIEW
ALL MODELS


SPECIFICATIONS

Models	NLR23-SH	NLR49-SH	NLR72-SH
Crated Weight (lbs) (kg)	302 (137)	460 (209)	618 (280)
Crated Height (in) (cm)	84-1/4 (214)	84-1/4 (214)	84-1/4 (214)
Crated Width (in) (cm)	29-1/8 (74)	56-3/4 (144)	78-3/8 (199)
Crated Depth (in) (cm)	33-1/2 (85)	33-1/2 (85)	33-1/2 (85)
Interior Height (in) (cm)	61 (155)	61 (155)	61 (155)
Interior Width (in) (cm)	23-3/4 (60)	51-1/2 (131)	74-1/4 (189)
Interior Depth (in) (cm)	27 (69)	27 (69)	27 (69)
Overall Height (in) (cm)	83-3/4 (213)	83-3/4 (213)	83-3/4 (213)
Overall Width (in) (cm)	27-1/2 (70)	55-1/4 (140)	78 (198)
Overall Depth (in) (cm)	33 (84)	33 (84)	33 (84)
Gross Cubage (CuFt) (L)	23.0 (651)	49.0 (1387)	72.0 (2038)
Number of Shelves	4	8	12
Shelf Area (SqFt) (Sqm)	18 (1.67)	39 (3.6)	56.5 (5.25)
Number of Doors	2	4	6
Number of Casters	4	4	6
Condensing Unit Size	1/3 HP	1/3 HP	3/5 HP
Refrigerant	R-134a	R-134a	R-404a
Electrical Characteristics	115/60/1	115/60/1	115/60/1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-15P
Total Amp Draw	7.5	7.5	10.0


Specifications subject to change without notice.

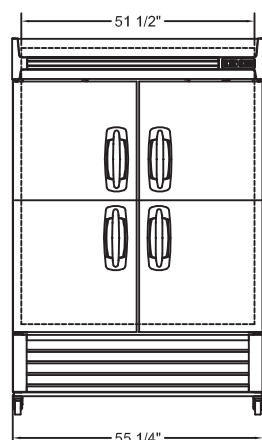


NLR49-SH
FRONT



NLR49-SH
TOP

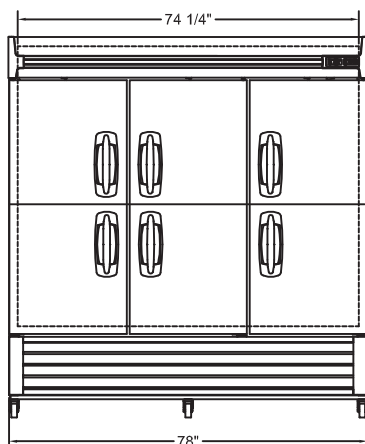

NLR72-SH
FRONT

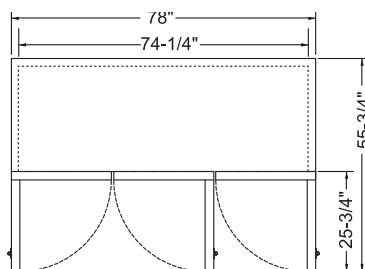

NLR72-SH
TOP



NORLAKE[®]

Revision Date: 03/17
© 2015 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 158007