

NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-4291 FAX
www.norlake.com



NOVA™ HEATED ROLL-THRU CABINETS



PWW332

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

HEATED ROLL-THRU CABINETS

SPECIFICATIONS FOR: PWW332 & PWW724

- **Exterior Finish:** Exterior side and doors are stainless steel. The exterior top and bottom are galvanized steel. All exterior joints and seams fold in without lap joints. No exposed raw edges.
- **Interior Finish:** Interior liner and interior door panels are stainless steel
- **Insulation:** The complete cabinet and door(s) are foamed-in-place with polyurethane insulation
- **Hardware:** Heavy duty, pivot hinges; centered key locks; horizontal work flow handles; self-adjusting magnetic gaskets. Each compartment has stainless steel bumper/cart guides.
- **Electrical:** All models are standard with an interior incandescent light activated by a switch for the doors.
- **Instrumentation:** Digital LED thermometer reading degrees F
- **Heating system:** Electrically operated 1500 watt heating system for the two door model and 3000 watt heating system for the four door model, is controlled by a thermostat mounted in front of the cabinet. Heating element is located in the interior ducting. Forced air distribution maintains desired uniform temperature throughout the cabinet. Operating temperature is adjustable from +180°F to a maximum of +200°F.
- **Approvals:** UL, C-UL and UL Sanitation listed**

STANDARD FEATURES

- Digital thermometer
- Ducted air distribution
- Horizontal work flow handle
- Incandescent interior light
- Key locks
- Magnetic gasketing
- Operating temperature: +180°F to +200°F
- Polyurethane insulation
- Roll-in entrance ramp
- Stainless steel exterior
- Stainless steel interior
- UL, C-UL & UL Sanitation listed**
- Warranties: 3 year parts & labor, 5 year compressor

OPTIONAL FEATURES*

- Alarm systems




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-L is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

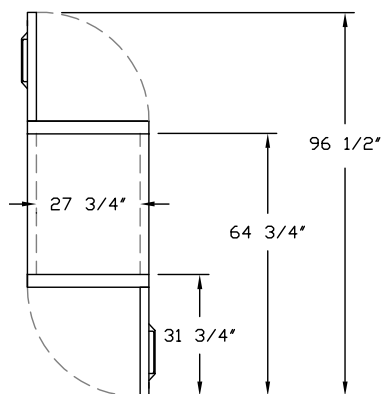


TOP VIEW
PWW332

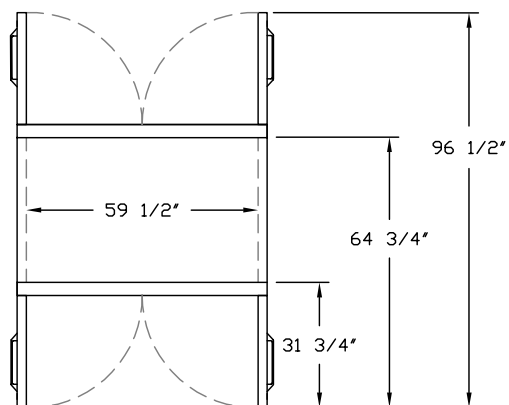

TOP VIEW
PWW724

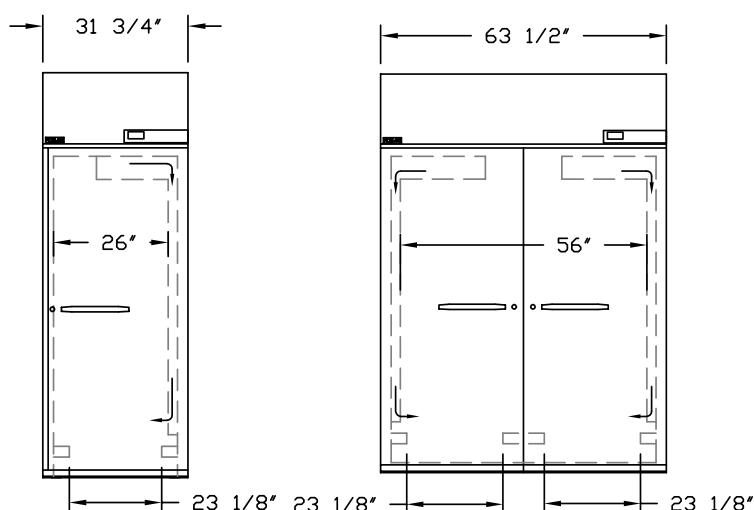

FRONT VIEW
PWW332 PWW724

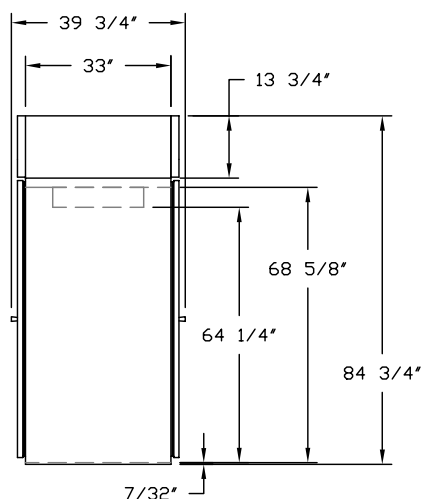

SIDE VIEW
BOTH MODELS

SPECIFICATIONS

Models	PWW332	PWW724
Crated Weight (lbs) (kg)	375 (169)	575 (259)
Crated Height (in) (cm)	89 (223)	89 (223)
Crated Width (in) (cm)	35-1/2 (89)	67 (168)
Crated Depth (in) (cm)	42 (105)	42 (105)
Interior Height (in) (cm)	68-5/8 (172)	68-5/8 (172)
Interior Width (in) (cm)	27-3/4 (69)	59-1/2 (149)
Interior Depth (in) (cm)	33 (83)	33 (83)
Overall Height (in) (cm)	84-3/4 (212)	84-3/4 (212)
Overall Width (in) (cm)	31-3/4 (79)	63-1/2 (159)
Overall Depth (in) (cm)	39-3/4 (99)	38-3/4 (97)
Gross Cubage (CuFt) (L)	36.4 (1030)	78.1 (2210)
Ramp Incline	7°	7°
Heater Wattage	1500	3000
Electrical Characteristics	115/60/1	208-230/60/1
Cord & Plug Furnished	Yes	No
NEMA Plug Configuration	5-20P	N/A
Total Amp Draw	12.5	15.2

Specifications subject to change without notice.



Revision Date: 03/16
© 2016 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 116934