HYDRA KOOL





PULL OUT
CONDENSING UNIT
ON SELF CONTAINED



PULL OUT EVAP PAN
FOR EASY CLEANING
ON SELF CONTAINED



DIGITAL CONTROLLER
WITH HIGH HEAD ALARM
ON SELF CONTAINED

FLAT GLASS DELI CASE

MEDIUM TEMPERATURE
TILT OUT FLAT
TEMPERED FRONT GLASS
REAR TEMPERED
SLIDING DOORS
DESIGNED FOR FRESH MEAT



MODELS

KFM - FG - (40,50,60,80,100,120) - S
KFM - FG - (40,50,60,80,100,120) - R

Intertek Intertek

REMOTE AND SELF CONTAINED
404A REF - FORCED AIR REFRIGERATION

AUTOQUOTES

MVP GROUP

Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com www.mvpgroupcorp.com

KOOL-IT

FLAT GLASS HYDRA KOOL DELI CASE

	MODELS	O.A. LENGTH INCHES	CASE TEMP	ELECTRICAL - 115 VOLTS					WEIGHT LBS
				COMPRESSOR		LIGHTS AND FANS	EVAP PAN	TOTAL AMPS	
				F.L.A.	L.R.A.				
SELF CONTAINED	KFM-FG-40-S	40-3/8	32/40 F	10.5	40	1.0	3.3	14.8	351
	KFM-FG-50-S	52-1/8	32/40 F	8.4	41	1.1	3.3	12.7	399
	KFM-FG-60-S	60	32/40 F	8.4	41	1.3	3.3	13.1	452
	KFM-FG-80-S	77-1/2	32/40 F	9.9	49	2.0	3.3	15.2	562
	KFM-FG-100-S	101-1/8	32/40 F	12.9	64	2.2	3.3	18.4	697
	KFM-FG-120-S	117	32/40 F	12.9	64	2.5	3.3	18.8	831

	MODELS	O.A. LENGTH INCHES	CASE TEMP	115 VOLTS TOTAL AMPS	B.T.U.	WEIGHT LBS
REMOTE	KFM-FG-40-R	40-3/8	32/40 F	0.5	2194	295
	KFM-FG-50-R	52-1/8	32/40 F	0.6	2859	344
	KFM-FG-60-R	60	32/40 F	0.9	3260	397
	KFM-FG-80-R	77-1/2	32/40 F	1.1	4209	529
	KFM-FG-100-R	101-1/8	32/40 F	1.3	4845	642
	KFM-FG-120-R	117	32/40 F	1.6	6357	765


THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT

B.T.U.'S CALCULATED AT +14^0 F EVAP AND 90^0 F AMBIENT

CASES ENGINEERED TO OPERATE AT 75^{0}F AND 55% RH

** ON REMOTE CASES - IF NO FLOOR DRAIN IS PROVIDED -
AN EVAPORATIVE DRAIN PAN MUST BE ORDERED
ADD 3.3 AMPS WHEN USING A PAN

O.A. DIMENSIONS INCLUDE (2) ENDS - EACH 1-1/2"

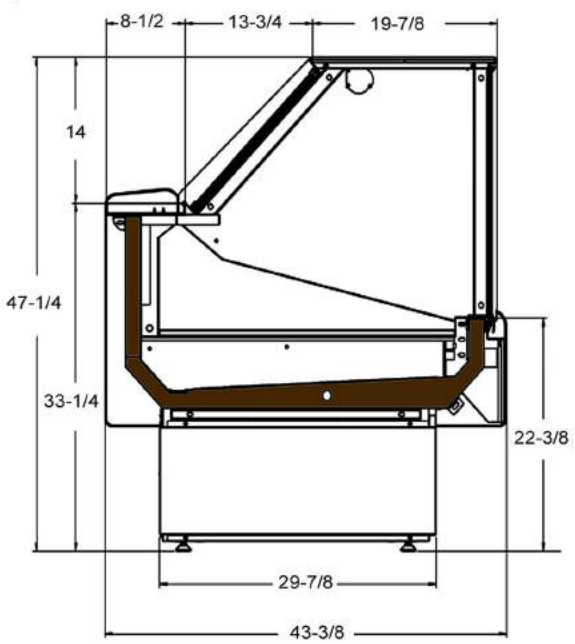

MOUNTING

STANDARD	OPTIONAL	OPTIONAL
		
ADJUSTABLE FEET	ADJUSTABLE LEGS	CASTERS

STANDARD FEATURES

- INSULATION - INJECTED FOAM
- INTERIOR - STAINLESS STEEL
- EXTERIOR - PVC COATED STEEL-SILVER
- ENDS-FOAMED BLACK POLYSTYRENE
- TILT- FORWARD TEMPERED FRONT GLASS
- CORD AND PLUG
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY
- REMOVABLE REAR TEMPERED GLASS SLIDING DOORS
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- REMOVABLE EVAPORATIVE PAN FOR EASY CLEANING ON S/C ONLY
- PULL-OUT CONDENSING UNIT -ON S/C ONLY
- ANTI-CONDENSATE SYSTEM FOR FRONT GLASS
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7

OPTIONAL FEATURES

- CASTERS - ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS- FROM 5-1/8" TO 7-5/8"
- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- EVAPORATIVE PAN FOR REMOTE CASES
- WHITE APOXY BI-LEVEL WIRE RACKS
- SCALE STAND WITH RECEPTACLE
- CUTTING BOARD
- (2) OR (3) LEVEL STEP SHAM
- KNIFE SUPPORT

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)

PRINTED: 1-25-2014

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE